



PS 180-12 XLR CON

TECHNICAL DATASHEET

PS 180-12 XLR CON

Technical Data

Dimensions 350 mm x 320 mm x 90 mm [L x D x H]
13.78 in x 12.60 in x 3.55 in [L x D x H]

Control DMX
1 x DMX in (RJ45 external)
1 x DMX out (RJ45 internal)

Input Voltage Power supply: internal | 100 - 240, 277 VAC (50 - 60 Hz) | 127 - 431 VDC

Power Consumption Max. 180 W

Power Factor Correction > 0,9 @ max. Load

Protection Class I

Output Voltage 12 V
3 x XLR 5pol (max. 56 X-LED-DOTs each outlet)

Inrush Max. 75 A

Operating Temperature Range -20 °C / +40 °C | -4 °F / +104 °F

Housing Steel-sheet, powdercoated

Housing Color(s) White (RAL 9010)


Weight 6,1 kg (13.45 lbs)

Ingress Protection IP20

Environment 
indoor

Certification   

Engineering Drawing

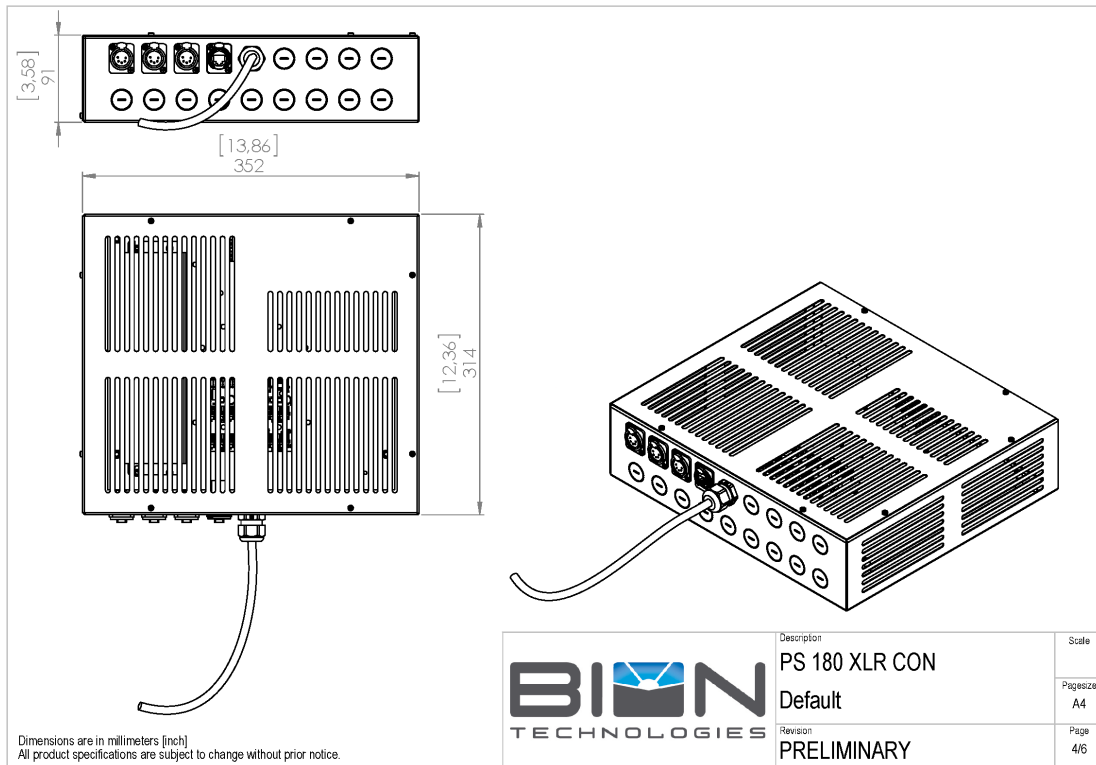



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2016, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice