


# linea xs hp
## pureWhite

The **linea xs** is an impressive low-voltage member of the **linea family** of linear façade luminaires. It not only offers the usual high lighting technology and versatility in beam angles but also expands these with additional options such as integrable linear louvers or honeycomb louvers, which enable optimal glare control.

The innovative **one-block design** ensures that the housing is made from a single piece, minimizing the number of sealing surfaces and thus reducing potential weak points in the construction.

The use of high-quality materials such as highly refined extruded aluminum profiles and low-iron, pre-stressed glass ensures a long lifespan for the luminaire, even under challenging conditions.

## Dimensions




**Metric:**
324 mm, 477 mm, 629 mm, 782 mm, 934 mm, 1087 mm, 1239 mm (X)
46 mm (Y)
57 mm (Z)
**Imperial**
12.76 in, 18.78 in, 24.77 in, 30.79 in, 36.78 in, 42.80 in, 48.78 in (X)
1.82 Inch (Y)
2.25 Inch (Z)

## Technical Data

| | |
|---|---|
| Luminous color | 2200 K, 2700 K, 3000 K, 3500 K, 4000 K |
| Luminous flux | 324 mm \| 12.76 in → max. 876 lm<br>477 mm \| 18.78 in → max. 1314 lm<br>629 mm \| 24.77 in → max. 1752 lm<br>782 mm \| 30.79 in → max. 2190 lm<br>934 mm \| 36.78 in → max. 2628 lm<br>1087 mm \| 42.80 in → max. 3066 lm<br>1239 mm \| 48.78 in → max. 3504 lm |
| Number of LED(s) | 324 mm \| 12.76 in → 8 LEDs<br>477 mm \| 18.78 in → 12 LEDs<br>629 mm \| 24.77 in → 16 LEDs<br>782 mm \| 30.79 in → 20 LEDs<br>934 mm \| 36.78 in → 24 LEDs<br>1087 mm \| 42.80 in → 28 LEDs<br>1239 mm \| 48.78 in → 32 LEDs |
| Glare Protection | No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal) |
| Dimming | Integrated interface(s) / control: NDIMtc, 0-10 V, DMX<br>External operating device, e.g. DALI, DMX |
| Housing | Extruded aluminium profile |
| Housing color | Aluminium anodized, Black anodized |
| Lens | Ultra clear, tempered safety glass |
| Weight | 324 mm \| 12.76 in→1.5 kg \| 3.4 lb<br>629 mm \| 24.77 in→2.1 kg \| 4.7 lb<br>934 mm \| 36.78 in→3.2 kg \| 7.1 lb<br>1239 mm \| 48.78 in→4.4 kg \| 9.8 lb<br>The weight of the fixture can vary depending on the configuration! |
| Environment | Indoor, Outdoor |
| Ingress protection rating | IP66 |
| Humidity | 0 to 95%, non-condensing |
| Ambient temperature (Operation) | -40 °C to 40 °C \| -40 °F to 104 °F |
| Ambient temperature (Storage) | -40 °C to 80 °C \| -40 °F to 176 °F |
| Ambient temperature (Start-up process) | -25 °C to 40 °C \| -13 °F to 104 °F |
| Lumen Maintenance [L70] @ 25 °C | 65,000 h |
| Lumen Maintenance [L70] @ 40 °C | 40,000 h |
| Impact protection rating | IK08 |
| Electrical data | |
| Integrated interface(s) / control: NDIMtc, 0-10 V, DMX | |
| Constant voltage | 36 V |
| Power Consumption | 324 mm \| 12.76 in → 14 W<br>477 mm \| 18.78 in → 21 W |

sales@biontechnologies.com
www.biontechnologies.com
Phone:
(DE) +49 8231 95787 0




All information without guarantee. Errors, changes and misprints excepted.


| | |
|---|---|
| | 629 mm \| 24.77 in → 28 W<br>782 mm \| 30.79 in → 35 W<br>934 mm \| 36.78 in → 42 W<br>1087 mm \| 42.80 in → 49 W<br>1239 mm \| 48.78 in → 56 W |
| Protection class | III |
| External operating device, e.g. DALI, DMX | |
| Constant current | 500 mA |
| Power Consumption | |
| | 324 mm \| 12.76 in → 15 W \| 31 VDC<br>477 mm \| 18.78 in → 21 W \| 43 VDC<br>629 mm \| 24.77 in → 27 W \| 54 VDC<br>782 mm \| 30.79 in → 33 W \| 66 VDC<br>934 mm \| 36.78 in → 39 W \| 77 VDC<br>1087 mm \| 42.80 in → 44 W \| 89 VDC<br>1239 mm \| 48.78 in → 50 W \| 101 VDC |
| Protection class | II |
| LED-Class | Class 2 LED-Product |
| Approbation | CE, ETL, FCC |


Designed and Developed in Bavaria.
Made in Germany.

## Beam Angles

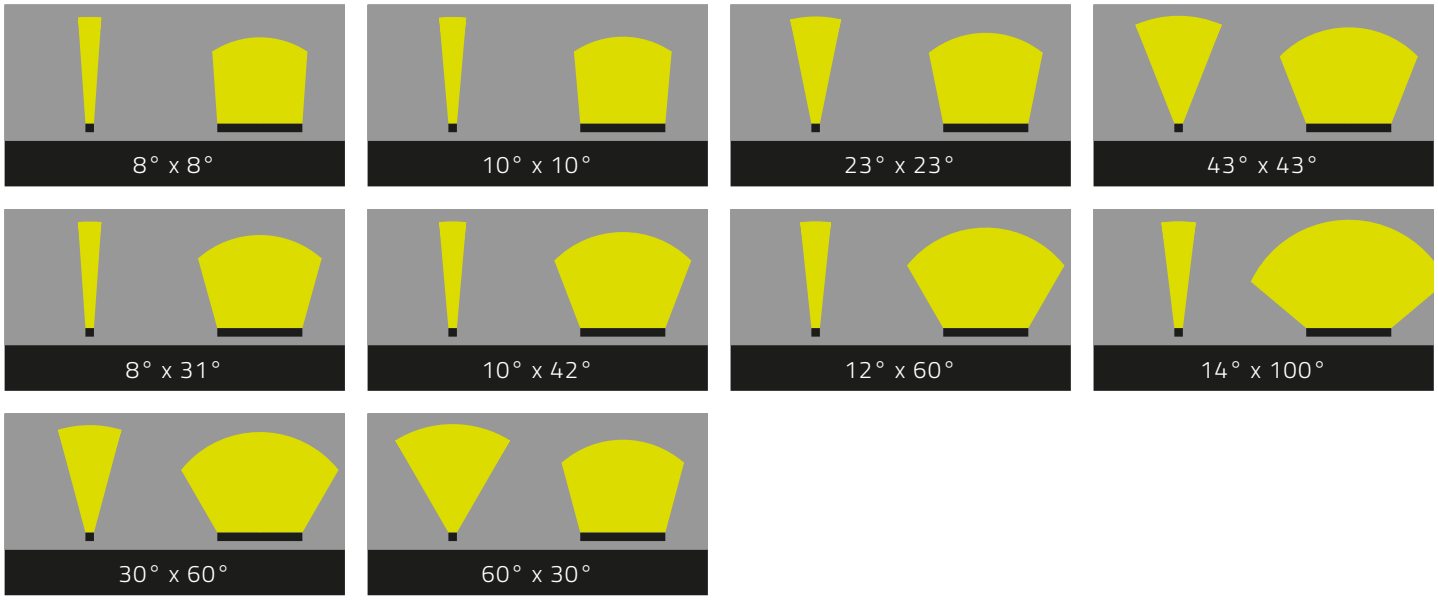


## Accessories

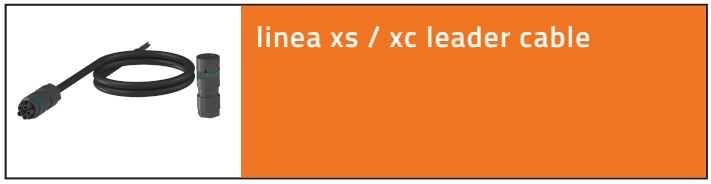

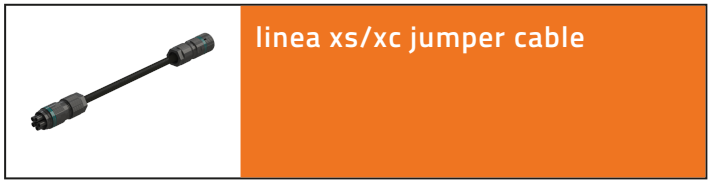








All information without guarantee. Errors, changes and misprints excepted.

BION TECHNOLOGIES

**linea xs hp** *pureWhite*

## Configurator

LIN-XS-HP - (1)_____ - (2)_____ - (3)_____ - (4)_____ - (5)_____ - (6)_____ - (7)_____ - (8)_____ - (9)_____ - (10)_____ - (11)_____ -Y01

| 1 Luminous color | |
|---|---|
| PW8322 | pW 2200 K / 3 SDCM / CRI > 80 |
| PW8327 | pW 2700 K / 3 SDCM / CRI > 80 |
| PW8330 | pW 3000 K / 3 SDCM / CRI > 80 |
| PW8335 | pW 3500 K / 3 SDCM / CRI > 80 |
| PW8340 | pW 4000 K / 3 SDCM / CRI > 80 |

| 2 Dimming | |
|---|---|
| NDIMTC | NDIMtc |
| 010V | 0-10 V |
| DMX | DMX |
| EXT | External operating device, e.g. DALI, DMX |

| 3 Dimension | |
|---|---|
| 324 | 324 mm / 12.76 in |
| 477 | 477 mm / 18.78 in |
| 629 | 629 mm / 24.76 in |
| 782 | 782 mm / 30.79 in |
| 934 | 934 mm / 36.77 in |
| 1087 | 1087 mm / 42.80 in |
| 1239 | 1239 mm / 48.78 in |

| 4 Beam Angle | |
|---|---|
| 8X8 | 8° x 8° |
| 10X10 | 10° x 10° |
| 23X23 | 23° x 23° |
| 43X43 | 43° x 43° |
| 8X31 | 8° x 31° |
| 10X42 | 10° x 42° |
| 12X60 | 12° x 60° |
| 14X100 | 14° x 100° |
| 30X60 | 30° x 60° |
| 60X30 | 60° x 30° |

| 5 Housing color | |
|---|---|
| AA | Aluminium anodized |
| BA | Black anodized |

| 6 Glare Protection | |
|---|---|
| OP | No Glare Protection |
| HL64 | Honeycomb louver (internal, 6,4mm) |
| LLO | Linear louver (internal) |

| 7 Approbation | |
|---|---|
| CE | European Union |
| ETL | North America |

| 8 Wiring configuration | |
|---|---|
| IOCC | IN/OUT with Connector |
| IXCX | only IN with Connector |
| IOOO | IN/OUT with open ends |
| IOOC | IN open end / OUT socket |
| IXOX | only IN with open ends |

| 9 Luminaire circuit | |
|---|---|
| PD | Power-Data |
| C1 | Circuit 1 |
| C2 | Circuit 2 |

sales@biontechnologies.com
www.biontechnologies.com

Phone:
(DE) +49 8231 95787 0



All information without guarantee. Errors, changes and misprints excepted.

# linea xs hp *pureWhite*

| 10 Leader cable length | |
|---|---|
| ETE | End to end - Leader length |
| 003 | 30 cm (11.8 in) leader cable |
| 006 | 60 cm (23.6 in) leader cable |
| 009 | 90 cm (35.4 in) leader cable |
| 012 | 1,2 m (47.2 in) leader cable |
| 015 | 1,5 m (59 in) leader cable |

| 11 Mounting | |
|---|---|
| BS | Universal mounting bracket |
| BSB | Universal mounting bracket burnished |
| FX015 | Fix 0° -15°, SW 5° |
| ND | without bracket |

sales@biontechnologies.com
www.biontechnologies.com
Phone:
(DE) +49 8231 95787 0



All information without guarantee. Errors, changes and misprints excepted.